


FULL L-ROD KIT INCLUDES:

- 26" x 11" Curved Shower Rod (A)
- 53" Straight Shower Rod (B)
- 36" Trimmable Support Rod (C)
- 2x Wall Mounts (D) (includes eight screws)
- Ceiling Mount (E) (includes two screws)
- Support Ring (F)

INSTALLATION INSTRUCTIONS:

1. Determine desired height of shower curtain rod. Keep in mind that the length of the custom-tailored curtain provided by Bliss Tubs is 54".
2. Install rod wall mounts (D) at equal heights. One will be mounted on the back wall. Four mounting screws and anchors are provided for each wall mount
 - a. For stud installation, use only the screws.
 - b. For dry wall and/or tile installation, use anchors and screws.
3. Join together the straight shower rod (B) with the shorter curved shower rod (A).
4. Depending on your bathtub installation, the shower rod set-up may need to be trimmed to the desired length. Trimming the end of the straight shower rod (B) with a metal cutting device (jigsaw, miter saw, reciprocating saw) will determine the length, while trimming the end of the short curved shower rod (A) will determine the depth.
5. Before securing shower rods to wall mounts (D), slide the support ring (F) over the rod joint. Now secure shower rod to wall mounts (D) using set screws provided.
6. Installing the support rod (C):
 - a. Secure ceiling mount (E) to wood in ceiling above the center of the curve of shower rod.
 - b. Using a level on the shower rod, determine appropriate length of support rod (C). Cut excess length if necessary. **DO NOT** cut off the threaded end.
 - c. Thread the support rod (C) into the ceiling mount (E).
 - d. Insert end of support rod (C) into the support ring (F) and tighten support ring onto the shower rod with set screw to complete assembly.

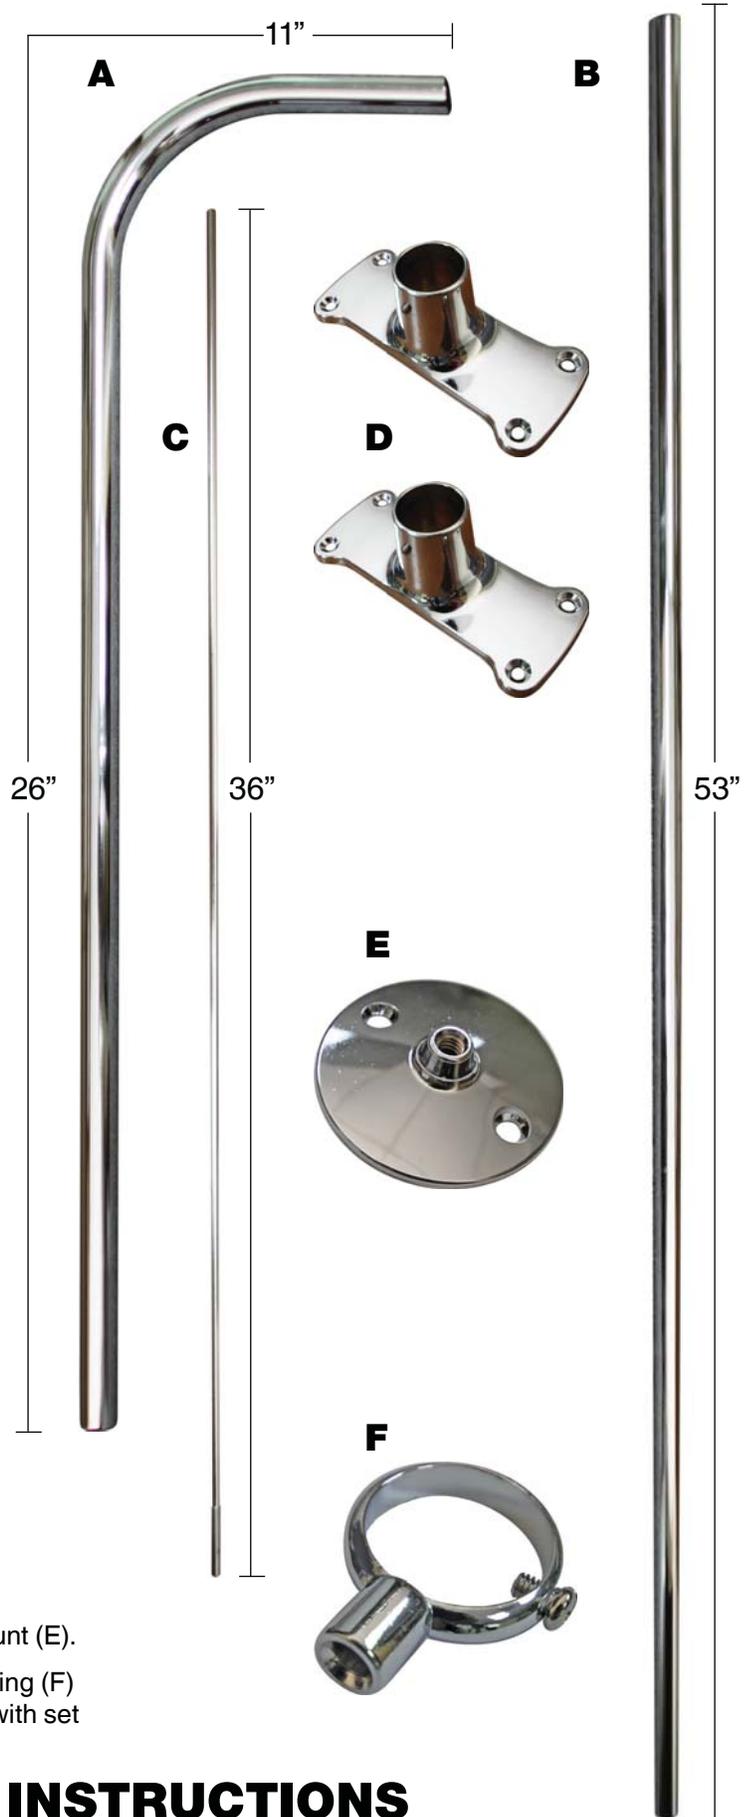

SAVE THESE INSTRUCTIONS